

INSPIRATION
SERIES

**M³ TRACK LIGHT
SYSTEM**

DALI & 0-10V Dimming



Light Bar - 15W
SES-MMA-15-CCT



Light Bar - 22W
SES-MMA-22-CCT



Frosted Light Bar - 15W
SES-MMD-15-CCT



Frosted Light Bar - 22W
SES-MMD-22-CCT



Axis Light Bar - 15W
SES-MMB-15-CCT



Axis Light Bar - 22W
SES-MMB-22-CCT



Frosted Axis Light Bar - 15W
SES-MME-15-CCT



Frosted Axis Light Bar - 22W
SES-MME-22-CCT



Frosted Slab Light Bar - 15W
SES-MMC-15-CCT



Frosted Slab Light Bar - 22W
SES-MMC-22-CCT



Adjustable Track Head - 5W
SES-MMS-5-CCT



Adjustable Track Head - 15W
SES-MMS-15-CCT



Spotlight Track Head - 8W
SES-MSM-8-CCT



Track Head - 5W
SES-MSF-5-CCT



Track Head - 10W
SES-MSF-10-CCT



Track Head - 15W
SES-MSF-15-CCT



Double Track Head - 10W
SES-MSF-5*2-CCT



Orb Light - 5W
SES-ORB-5-CCT



Suspended Orb Light - 5W
SES-ORB-WIRE-5-CCT



Cylinder Light - 5W
SES-MSA-5-CCT



Suspended Cylinder Light - 15W
SES-MSE-15-CCT



Suspended Cylinder Light - 10W
SES-MSDA-10-CCT



Cone Light - 5W
SES-CONE-5-CCT



Suspended Cone Light - 5W
SES-CONE-WIRE-5-CCT



Dimmable



DALI

0-10V



DALI & 0-10V

Thanks to the advancement of technology, we have expanded our development and research of intelligent lighting systems. Our luminaires have since reached an advanced level of functionality. With a smart dimming app you can easily turn the fixtures on and off, as well as control the brightness and other functions that facilitate your lighting requirements.

Function



Intelligent system concept

Simple and easy to control lighting management



Adjustable bright and dark

Adjust the brightness of the light as needed.



Safety

DC48V



Can be grouped

Several lights can be divided into a group of management or a separate light independent management



Connection

Simple connection of INTEVISION DALI DC-BUS system through integration into an existing network.



Control

You can control the fixture by touch screen switch .



Energy saving

It can be adjusted according to the needs of intelligent lighting and brightness, so as to achieve the effect of energy saving.



Magnetic installation

Can quickly repair and replace the light, move the position of the light, change the type of light to suit the application of the scene.



Scene mode

You can set the switch to control the luminaire, different brightness and color temperature to establish multiple scene modes



Set open close

You can control the brightness of the lamp during the specified time, brightness and color temperature.




Time delay


You can set the delay of the lamp to turn off.

Installation diagram

DC-BUS (DALI)

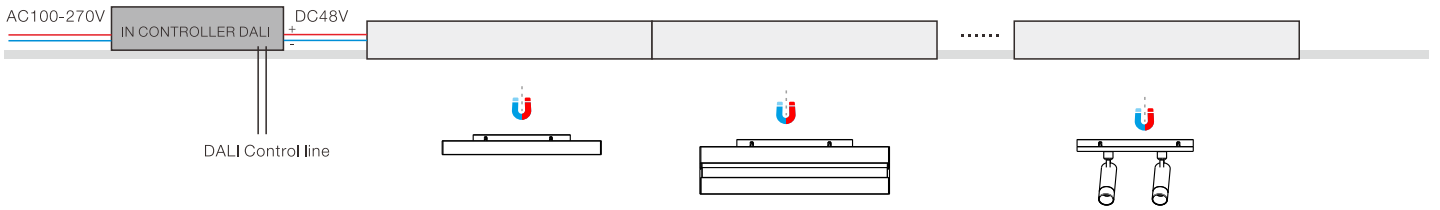


DC-BUS (0-10V)

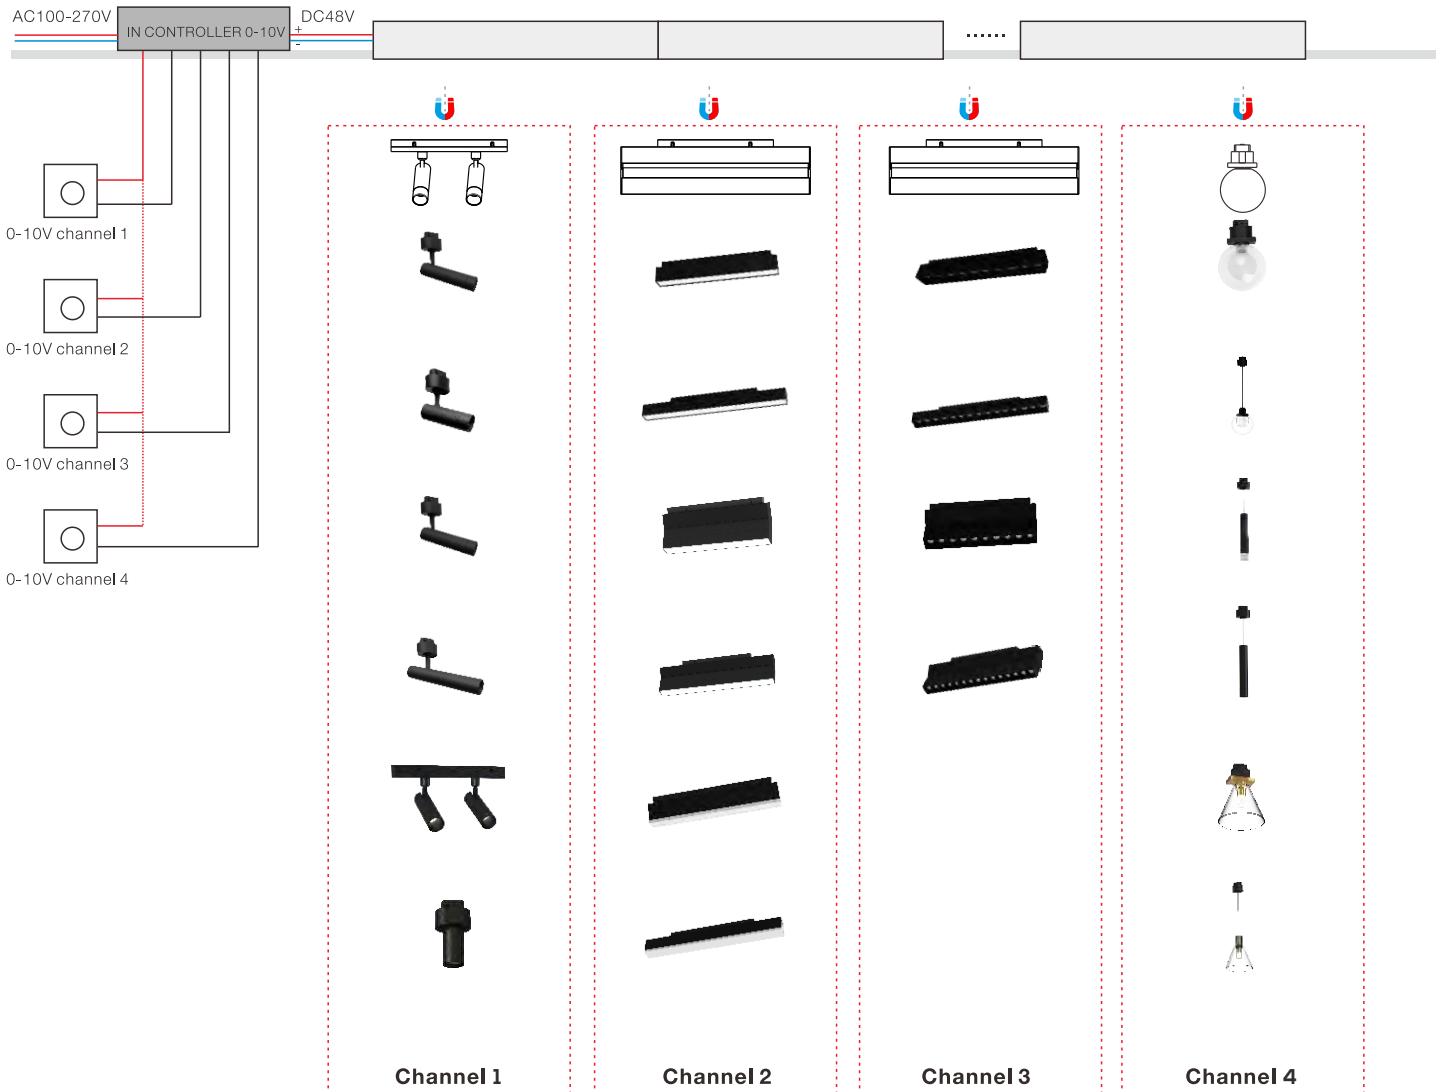

Applications

The M³ Track Light System components can be assembled in different ways for various lighting effects. Easily achieve both continuous or intermittent linear lighting with the magnetic function that allows you to quickly modify and replace pieces.

The track rails can be used recessed, suspended and surface mounted.

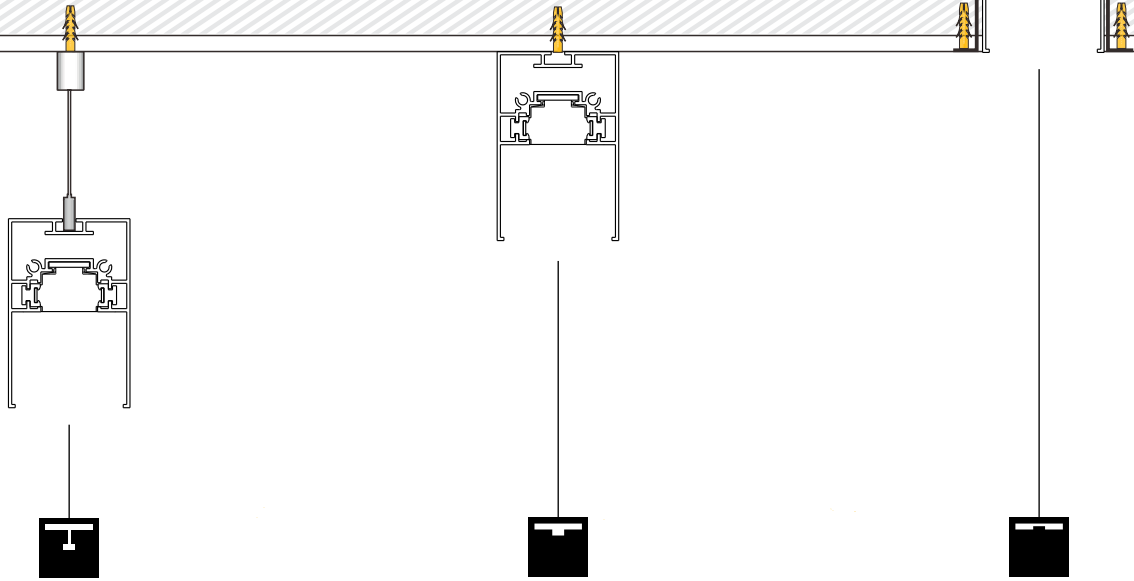

Analysis of Magnetic System Structure

- Safe and reliable through the pull test. Easy maintenance and rapid replacement without tools.


Through  pull test
ReportNo.: **50132428 001**




Test items and test requirements	Test instruction	Determination
Lamp head pull test: Pulling the lamp head out of the base requires at least 4 times the weight of the lamp base.	Lamp weight: 0.8kg 4 times the weight of the lamp head pull: 31.36N Lamp head pulls off from lamp holder: 34N for the first time 39N for the second time	Pass

- Magnetic linear light system operates with various kinds of lamps, meeting the needs of different applications.

- DC48V output, safety guaranteed.

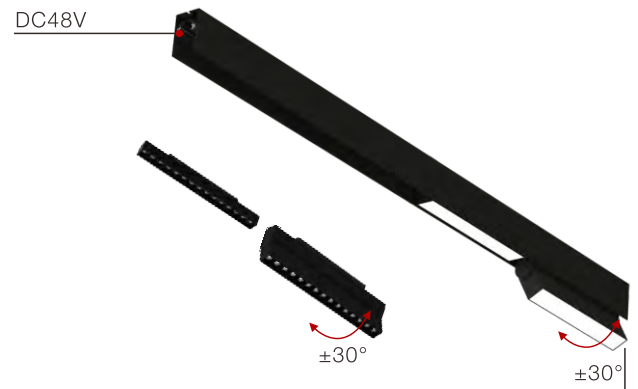


Light Bar - 15W SES-MMA-15-CCT

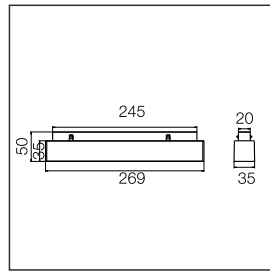


Power	15W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

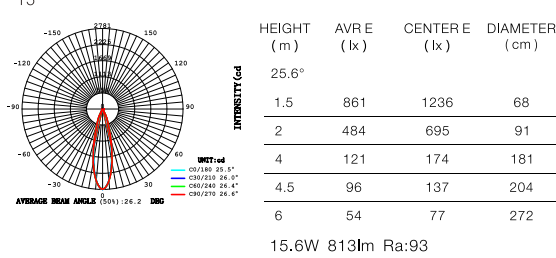


LED 4000K
CODE:AA8888888

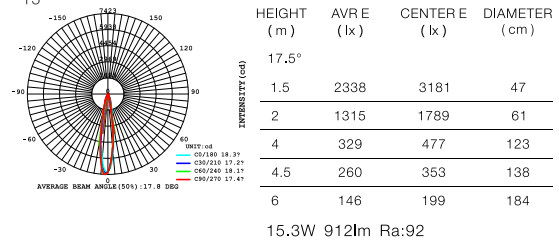


LED 3000K
CODE:AA8888888

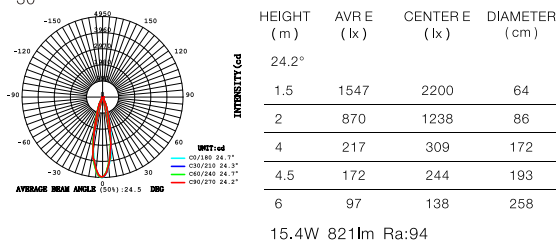


LED 4000K
CODE:AA8888888

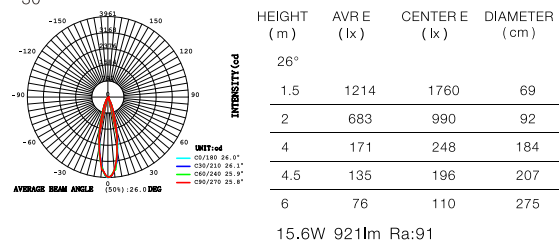


LED 3000K
CODE:AA8888888

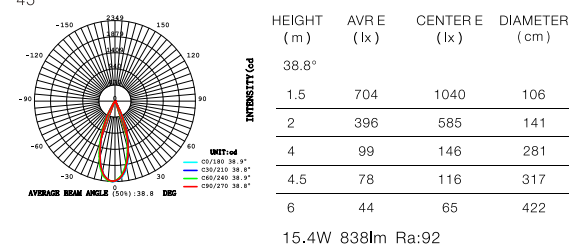

LED 4000K
CODE:AA8888888

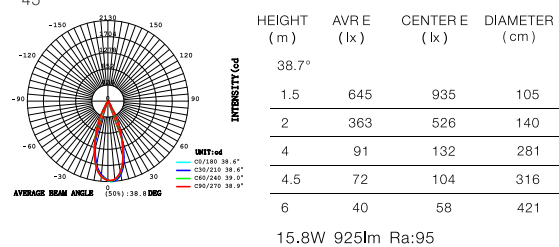


Light Bar - 22W SES-MMA-22-CCT

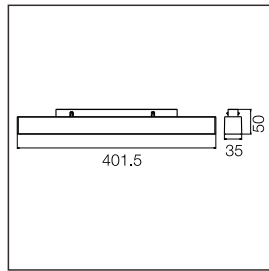


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

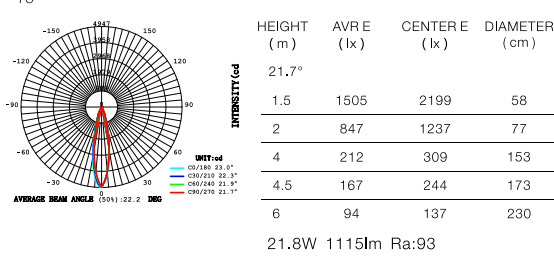


LED 4000K
CODE:AA8888888

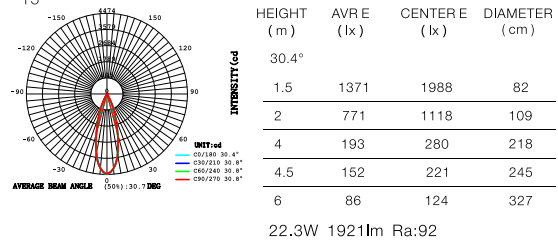


LED 3000K
CODE:AA8888888

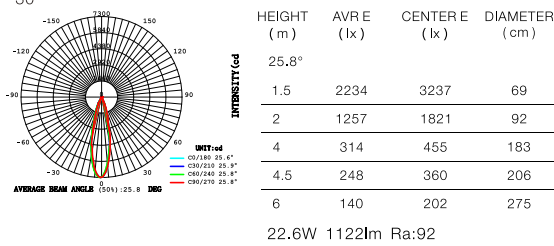


LED 4000K
CODE:AA8888888

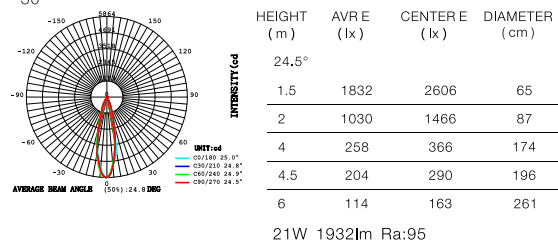


LED 3000K
CODE:AA8888888

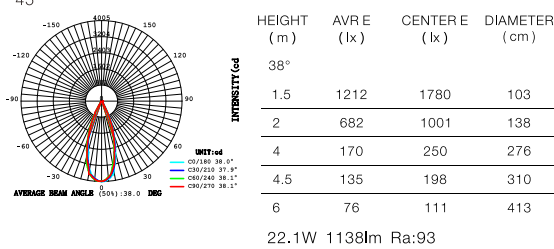

LED 4000K
CODE:AA8888888

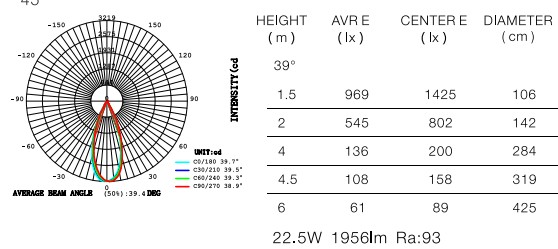


Frosted Light Bar - 15W SES-MMD-15-CCT

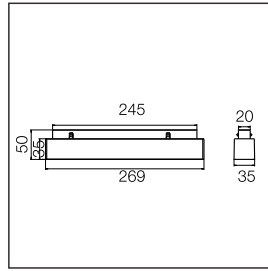

Power	15W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
99.3°			
1.5	13	34	353
2	7	19	471
4	2	5	941
4.5	2	4	1059
6	1	2	1412

14.9W 669lm Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
97.9°			
1.5	39	102	345
2	22	57	459
4	6	14	919
4.5	4	11	1034
6	2	6	1378


15.3W 703lm Ra:91

Frosted Light Bar - 22W SES-MMD-22-CCT

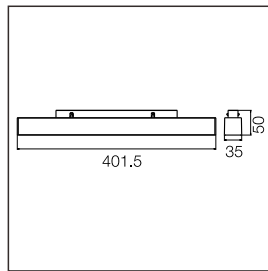

Power	22W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
100°			
1.5	51	134	358
2	29	75	477
4	7	19	954
4.5	6	15	1073
6	3	8	1431

15.6W 890lm Ra:94


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
109.2°			
1.5	44	137	422
2	25	77	563
4	6	19	1126
4.5	5	15	1266
6	3	9	1689


26.8W 943lm Ra:93

Axis Light Bar - 15W SES-MMB-15-CCT

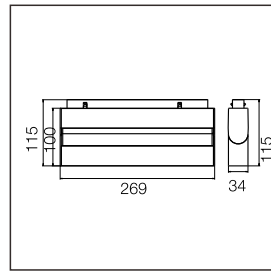


Power	15W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

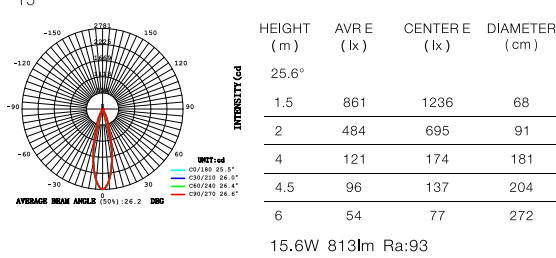


LED 4000K
CODE:AA8888888

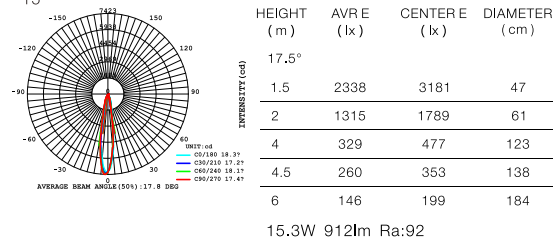


LED 3000K
CODE:AA8888888

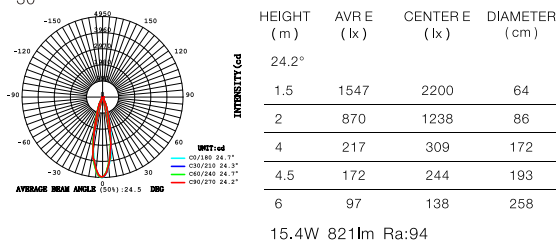


LED 4000K
CODE:AA8888888

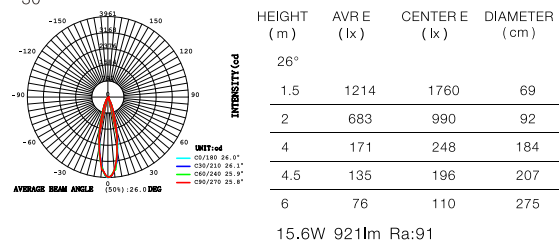


LED 3000K
CODE:AA8888888

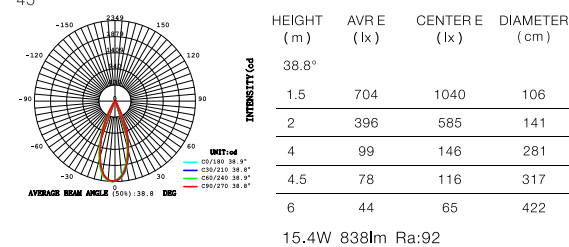

LED 4000K
CODE:AA8888888

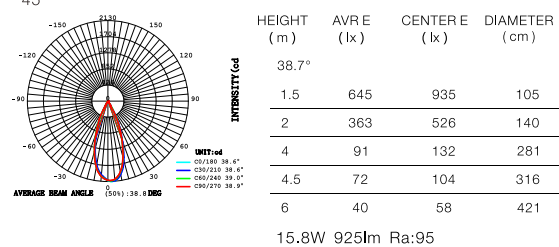


Axis Light Bar - 22W SES-MMB-22-CCT

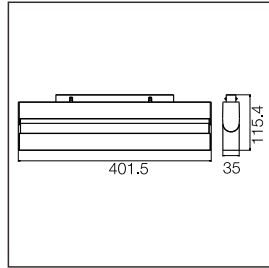


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

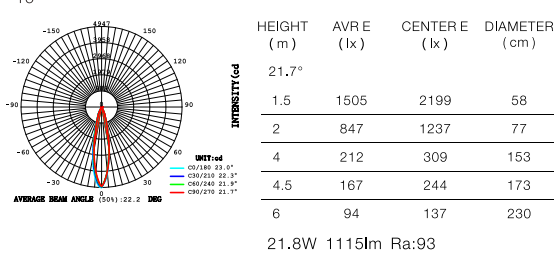


LED 4000K
CODE:AA8888888

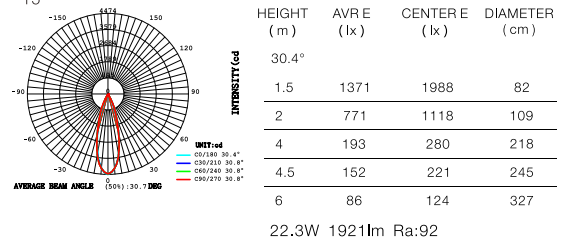


LED 3000K
CODE:AA8888888

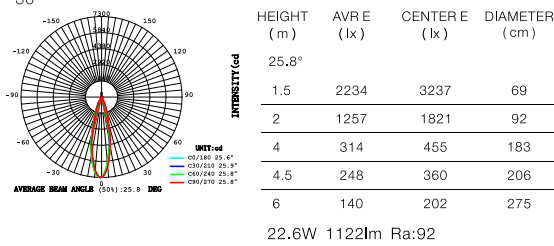


LED 4000K
CODE:AA8888888

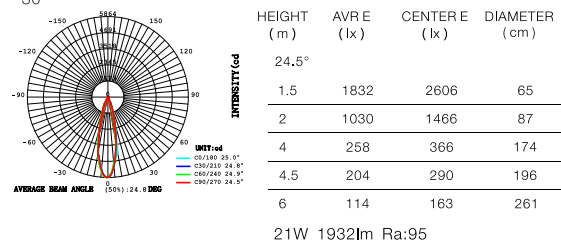


LED 3000K
CODE:AA8888888

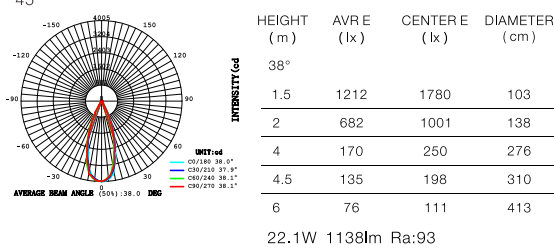

LED 4000K
CODE:AA8888888

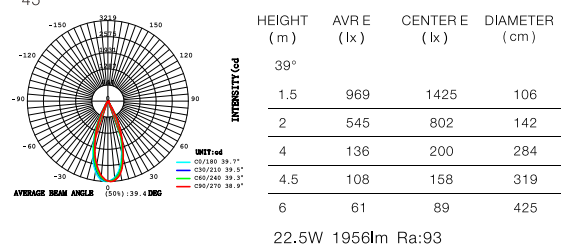


Frosted Axis Light Bar - 15W SES-MME-15-CCT

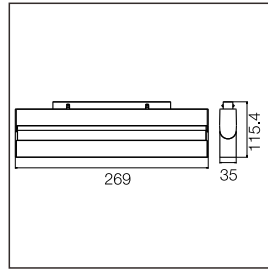

Power	15W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
99.3°			
1.5	13	34	353
2	7	19	471
4	2	5	941
4.5	2	4	1059
6	1	2	1412

14.9W 669lm Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
97.9°			
1.5	39	102	345
2	22	57	459
4	6	14	919
4.5	4	11	1034
6	2	6	1378


15.3W 703lm Ra:91

Frosted Axis Light Bar - 22W SES-MME-22-CCT

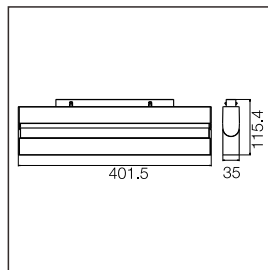

Power	22W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
100°			
1.5	51	134	358
2	29	75	477
4	7	19	954
4.5	6	15	1073
6	3	8	1431

15.6W 890lm Ra:94


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
109.2°			
1.5	44	137	422
2	25	77	563
4	6	19	1126
4.5	5	15	1266
6	3	9	1689


26.8W 943lm Ra:93

Frosted Slab Light Bar - 15W SES-MMC-15-CCT

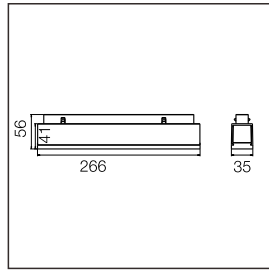

Power	15W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
100°			
1.5	52	117	309
2	29	66	412
4	7	17	824
4.5	6	13	927
6	3	7	1236

15.4W 601m Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
109.2°			
1.5	20	73	486
2	11	41	648
4	3	10	1296
4.5	2	8	1458
6	1	5	1944


15.3W 649lm Ra:91

Frosted Slab Light Bar - 22W SES-MMC-22-CCT

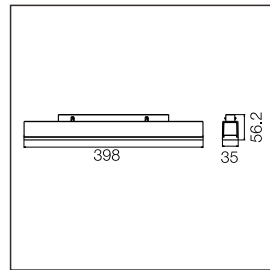

Power	22W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
113.4°			
1.5	14	47	457
2	8	27	609
4	2	7	1219
4.5	2	5	1371
6	1	3	1828

22.2W 890lm Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
112.6°			
1.5	32	104	450
2	18	59	599
4	4	15	1199
4.5	4	12	1348
6	2	7	1798


22.9W 920lm Ra:90

Adjustable Track Head - 5W SES-MMS-5-CCT

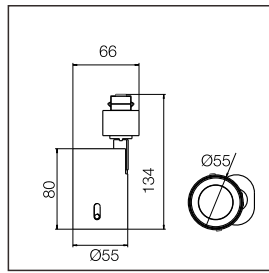


Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

Adjustable Track Head - 15W SES-MMS-15-CCT

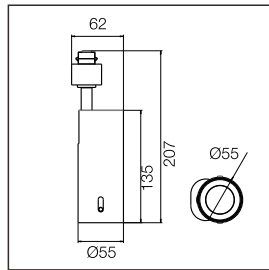

Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
14,2°			
1.5	1117	1584	37
2	628	891	50
4	157	223	99
4.5	124	176	112
6	70	99	149

5.2W 266lm Ra:93



LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
22°			
1.5	1119	1533	58
2	629	862	78
4	157	216	156
4.5	124	170	175
6	70	96	233


5.2W 286lm Ra:93

Spotlight Track Head - 8W SES-MSM-8-CCT

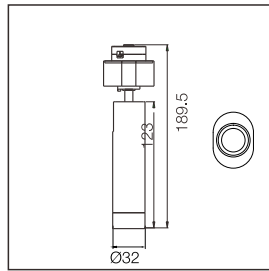

- Power** 8W
- CCT** 3000K ● 4000K ●
- Voltage** DC48V
- Output Lumens** 640 lm
- CRI** >90
- Material** Aluminum
- Color** Black / White
- Life** 30 000 H
- Warranty** 3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	2499	3096	32
2	1406	1742	43
4	351	435	87
4.5	278	344	97
6	156	194	130

8.7W 475lm Ra:92

LED 4000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	1105	1198	33
2	622	674	44
4	155	168	87
4.5	123	133	98
6	69	75	131

8.1W 506lm Ra:91




Track Head - 5W SES-MSF-5-CCT

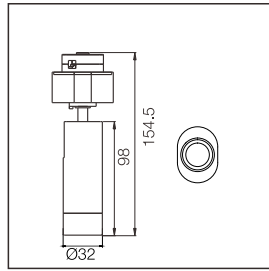

Power	5W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
33.4°			
1.5	234	348	90
2	131	196	120
4	33	49	240
4.5	26	39	270
6	15	22	360

5.8W 275lm Ra:92


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
29.5°			
1.5	305	445	69
2	172	250	92
4	43	63	184
4.5	34	49	207
6	19	28	276

5.5W 310lm Ra:91


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
33.6°			
1.5	174	250	90
2	98	141	121
4	25	35	241
4.5	19	28	271
6	11	16	362

5.6W 283lm Ra:91


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
34.3°			
1.5	251	381	92
2	141	214	123
4	35	54	247
4.5	28	42	277
6	16	24	370


5.3W 328lm Ra:92

Track Head - 10W SES-MSF-10-CCT

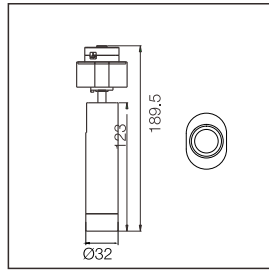

- Power** 10W
- CCT** 3000K ● 4000K ●
- Voltage** DC48V
- Output Lumens** 800 lm
- CRI** >90
- Material** Aluminum
- Color** Black / White
- Life** 30 000 H
- Warranty** 3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 596lm Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 655lm Ra:93


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	710	1091	93
2	400	614	124
4	100	153	248
4.5	79	121	279
6	44	68	372

9.8W 609lm Ra:91


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	506	774	90
2	285	746	120
4	71	109	240
4.5	56	86	269
6	32	48	359


9.5W 666lm Ra:92

Track Head - 15W SES-MSF-15-CCT

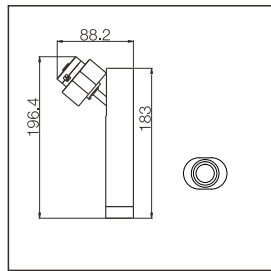

Power	15W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	907	1335	89
2	510	751	119
4	128	188	238
4.5	101	148	267
6	57	83	357

15.1W 877lm Ra:92


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	934	1394	85
2	526	784	114
4	131	196	227
4.5	104	155	255
6	58	87	341

15.3W 912lm Ra:93


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	825	1292	99
2	464	727	132
4	116	182	263
4.5	92	144	296
6	52	81	395

15.5W 892lm Ra:93



LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	421	617	117
2	237	347	156
4	59	87	313
4.5	47	69	352
6	26	39	469


15.2W 922lm Ra:92

Double Track Head - 10W SES-MSF-5*2-CCT

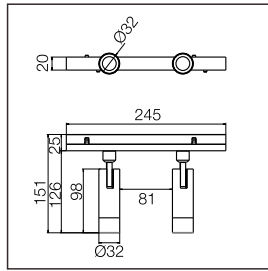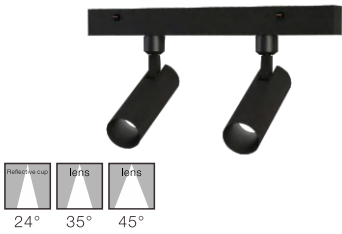

- Power** 10W
- CCT** 3000K ● 4000K ●
- Voltage** DC48V
- Output Lumens** 400 lm
- CRI** >90
- Material** Aluminum
- Color** Black / White
- Life** 30 000 H
- Warranty** 3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 596lm Ra:93


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 655lm Ra:93


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	710	1091	93
2	400	614	124
4	100	153	248
4.5	79	121	279
6	44	68	372

9.8W 609lm Ra:91


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	506	774	90
2	285	746	120
4	71	109	240
4.5	56	86	269
6	32	48	359


9.5W 666lm Ra:92

Orb Light - 5W SES-ORB-5-CCT

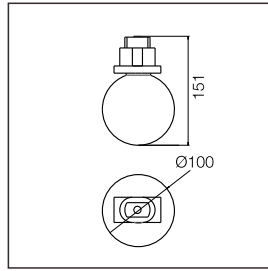

Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
111.4°			
1.5	9	36	440
2	5	20	587
4	1.3	5	1174
4.5	1	4	1320
6	0.6	2	1760

4.9W 235lm Ra:92


LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
122.4°			
1.5	4	16	546
2	2	9	728
4	0.6	2.3	1455
4.5	0.5	1.8	1637
6	0.3	1	2183


5.3W 267lm Ra:91

Suspended Orb Light - 5W SES-ORB-WIRE-5-CCT

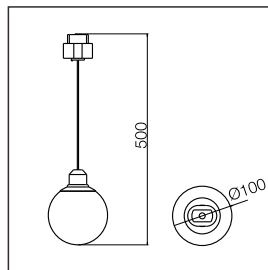

Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
111.4°			
1.5	9	36	440
2	5	20	587
4	1.3	5	1174
4.5	1	4	1320
6	0.6	2	1760

4.9W 235lm Ra:92



LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
122.4°			
1.5	4	16	546
2	2	9	728
4	0.6	2.3	1455
4.5	0.5	1.8	1637
6	0.3	1	2183


5.3W 267lm Ra:91

Cylinder Light - 5W SES-MSA-5-CCT

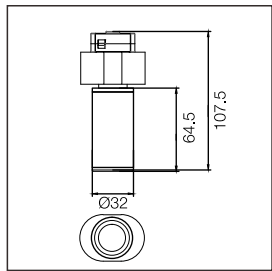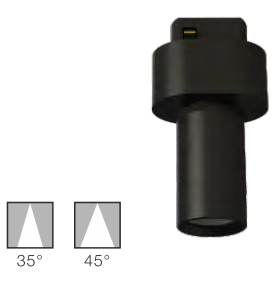


Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888

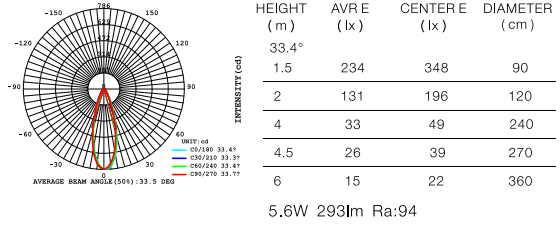


LED 4000K
CODE:AA8888888

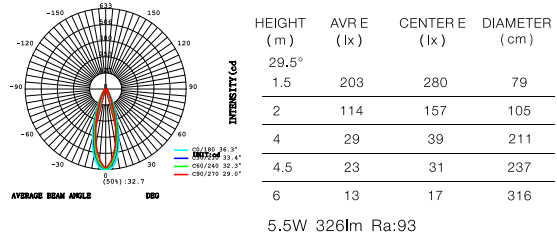


LED 3000K
CODE:AA8888888

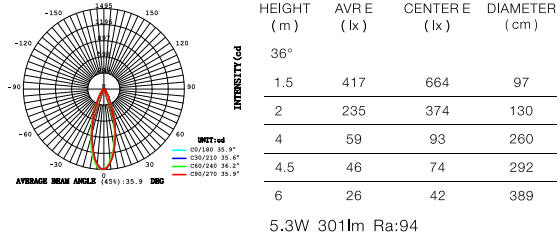

LED 4000K
CODE:AA8888888

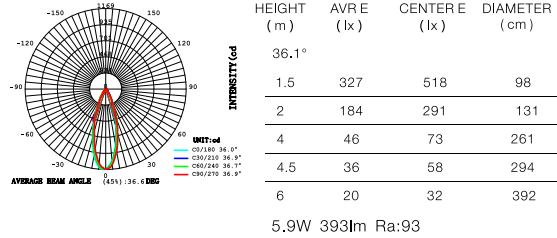


Suspended Cylinder Light - 15W SES-MSE-15-CCT

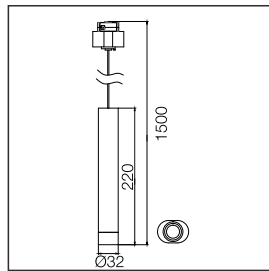

Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	7	71	963
2	4	40	1284
4	1	10	2568
4.5	0.8	8	2890
6	0.5	4	3853

15.9W 616lm Ra:92



LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	14	83	709
2	8	47	945
4	1.9	12	1890
4.5	1.5	9	2126
6	0.9	5	2835


16W 650lm Ra:93

Suspended Cylinder Light - 10W SES-MSDA-10-CCT

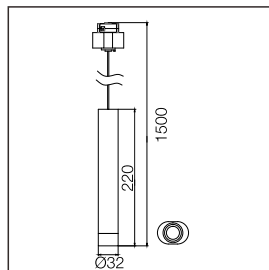

Power	10W
CCT	3000K ● 4000K ●
Voltage	DC48V
Output Lumens	650 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


Cone Light - 5W SES-CONE-5-CCT

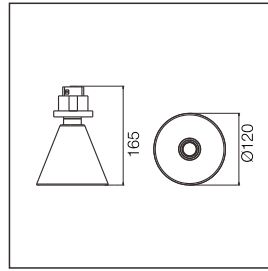

Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Copper
Life	30 000 H
Warranty	3 Years



LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
26,1°			
1.5	21	41	70
2	12	23	93
4	3	6	186
4.5	2	5	209
6	1	3	278

5.1W 246lm Ra:91




LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
29,1°			
1.5	25	42	73
2	14	24	97
4	4	6	194
4.5	3	5	219
6	2	3	292

5.1W 266lm Ra:92


Suspended Cone Light - 5W SES-CONE-WIRE-5-CCT

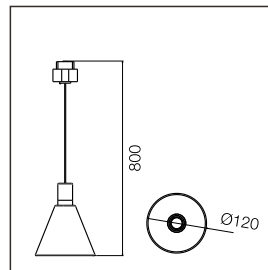

Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Copper
Life	30 000 H
Warranty	3 Years



LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
26,1°			
1.5	21	41	70
2	12	23	93
4	3	6	186
4.5	2	5	209
6	1	3	278

5.1W 246lm Ra:91




LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
29,1°			
1.5	25	42	73
2	14	24	97
4	4	6	194
4.5	3	5	219
6	2	3	292


5.1W 266lm Ra:92

Track Rail - 39.4" SES-MEN-RAIL

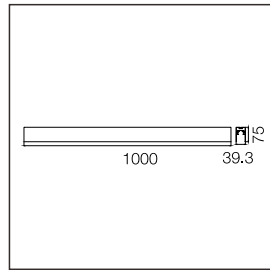


Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend

Track Rail (Recessed) - 39.4" SES-MECN-RAIL

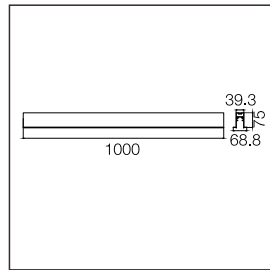


Material Aluminum
Color Black
Remark Magnetic track for recessed

Connector Kit SES-ME-CONNECTOR

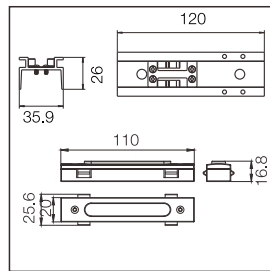



Material Aluminum
Color Black
Remark Used for connection and conduction between two tracks

Feeder Cable SES-ME-FEEDER

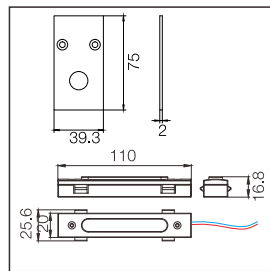


Material Aluminum
Color Black
Remark Used for magnetic track start and conduction

Corner H SES-MEN-CORNER-H

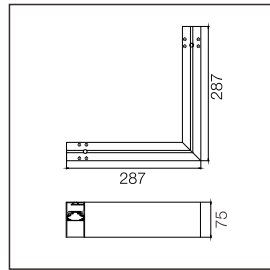


Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend the plane 90° Corner

Corner V SES-MEN-CORNER-V

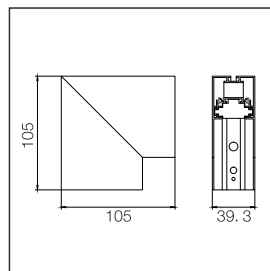


Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend the erect 90° Corner

Corner H (Recessed) SES-MECN-CORNER-H

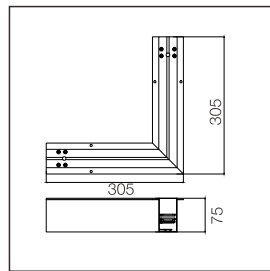


Material Aluminum
Color Black
Remark Magnetic track for recessed plane 90° Corner

Corner V (Recessed) SES-MECN-CORNER-V

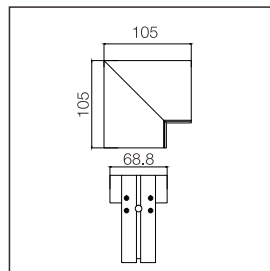


Material Aluminum
Color Black
Remark Magnetic track for recessed erect 90° Corner

120° Corner SES-MELN-CORNER

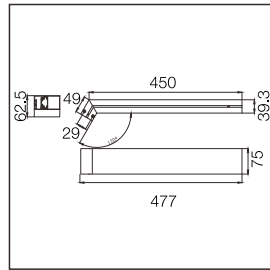


Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend the plane 120° Corner

120° Corner V SES-MEN-CORNER-V-60

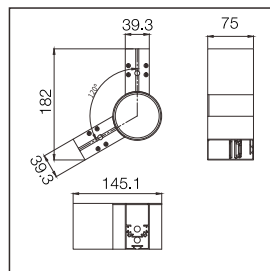


Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend the plane 120° Corner

120° Corner 3V SES-MEN-CORNER-3V-60

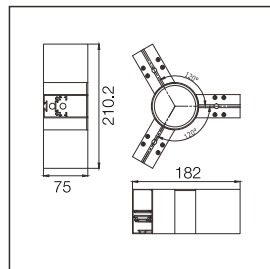


Material Aluminum
Color Black
Remark Magnetic track for surface mounting and suspend the plane 3x120° Corner

Pipe Kit - 15" SES-ME-PIPES

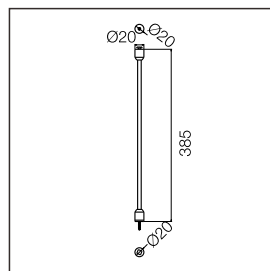

Material Aluminum
Color Black
Remark For magnetic track suspend accessories

Cover - 39.4" SES-ME-COVER

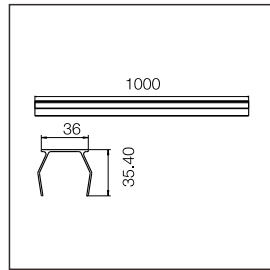

Material

PVC


Color

Blac

Remark

Used to cover the blank space of the track and to protect the interior when the track is concealed

End Cap SES-ME-CAP

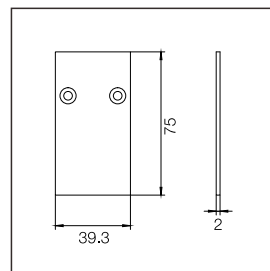

Material

Aluminum


Color

Black

Remark

For the end of the magnetic track

Surface Mount Anchors SES-ME-ANCHORS

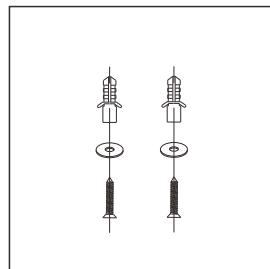

Material

Iron


Color

Chrome

Remark

For magnetic track surface mounting accessories

Suspension Cable Kit - 39.4" SES-ME-CABLE



Material

Aluminum


Color

Black

Remark


For magnetic track suspend accessories

External 0-10V & DALI Driver - 350W 48V SES-ME-DRIVER-350-48

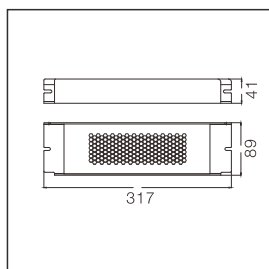


Input AC100-270V 50/60Hz
Output DC48V
Power Max. 350W
Material Aluminum
Color Chrome

Internal DALI Driver - 150W 48V SES-ME-DRIVER-150-48

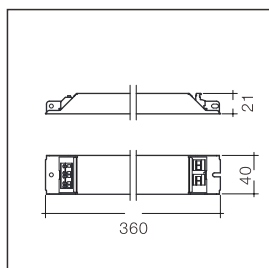



Input AC100-220V 50/60Hz
Output DC48V
Power Max. 150W
Material Plastic
Color White

Intelligent Dimmer Switch SES-ME-SWITCH-1




Material Plastic
Color White
Remark Intelligent dimmer switch

0-10V Dimmer Switch SES-ME-SWITCH-2



Material Plastic
Color White
Remark Intelligent dimmer switch
 (Only for DC-BUS 0-10V system. Can be divided into 4 groups to control the lamps)



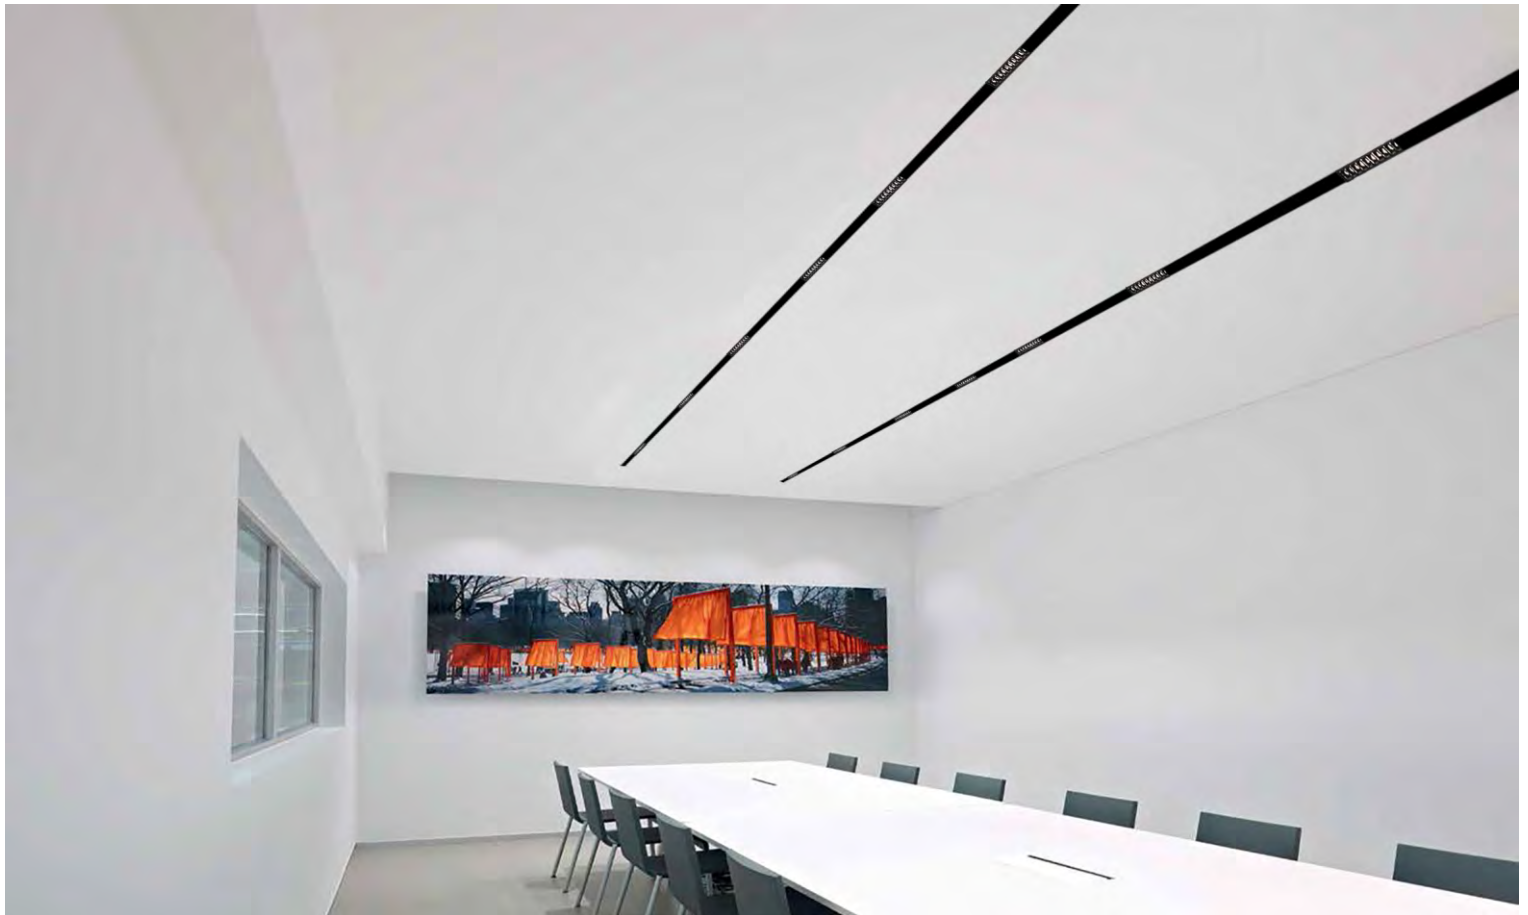



☎ 855-997-2746

📠 888-671-4872

✉ LED@SARINEnergy.com

🌐 SARINEnergy.com